

SONAROL

PERFECTHERM

Perfection in every detail



PERFECTHERM SONAROL



WARM



SILENT




TIGHT



SAFE

Reference window heat transfer coefficient	Uw = 0,78 W/m²K
Profiles	class A 6-chambers
Mounting depth	80 mm frame 80 mm sash
Sealed glass unit	48 mm, Ug = 0,5 W/m²K
Gaskets	centre gaskets in the frame and in the sash
Fittings	MACO from MULTI-MATIC series anti-wind latch anti-burglary hooks sash lifter with wrong handle position

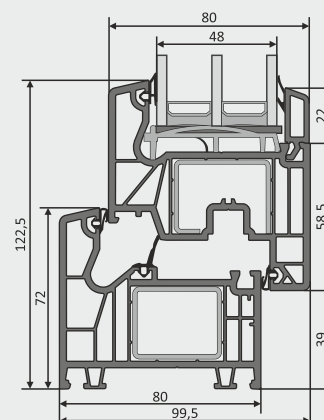

Adjust a window to your own needs



core color

▀ white, anthracite, carmel, brown



veneer colour

▀ over 30 patterns for use on one side or both sides of the window



handle type and shape

▀ various colors, shapes and types - standard, with key locking option or with locking button



cover colour

▀ cover colour adjusted to the colour of handles and/or veneer



glazing type and colour

▀ wide selection of glazing – frosted, anti-reflective, safe, sound-absorbing, ornamented



extras

▀ air inlet vents: manual, pressure-based, controlled by
▀ humidity sensor
▀ muntins: internal, Viennese, glued on, connectors, expansions

